


Eco Downlights

Stylish, High Performing and Cost Effective.

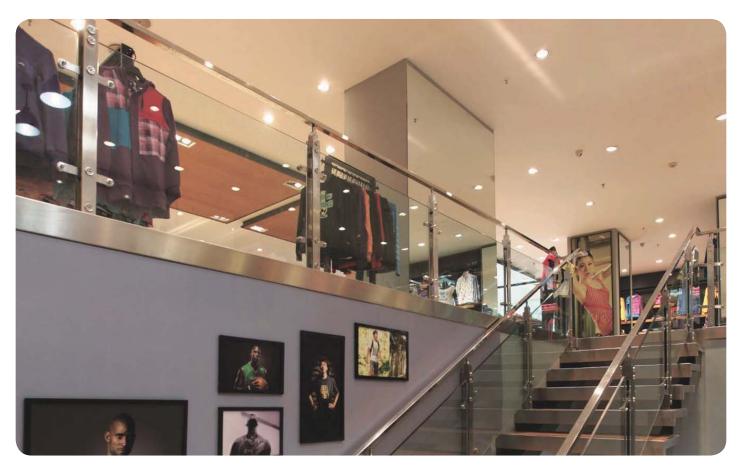

GE's Eco Downlight is a stylish fixture available in a range of options to deliver an effective solution for a range of applications. With an option of three sizes, wattages and colour temperatures the fixture offers the versatility to meet the requirement for every situation.

Applications

- Commercial Offices
- Residential
- Hospitality (Cafes, Restaurants, Hotels)
- Retail
- Conference Facilities





Specification Features –



Excellent Lighting



- High Colour rendering index up to Ra80+
- Excellent light output and Uniformity
- Low glare
- Wide range of colour temperatures

Quality Structure



- Die cast aluminium radiator structure delivering excellent heat management
- Aesthetically pleasing and stylish Polycarbonate trim
- Quality spring mounting clips

Environmentally Friendly



- Long lifetime, up to 25,000 hours @ L70,
- No UV, InfraRed or Mercury








10W

15W

33W

Dimensions -





	D Outerdiameter (mm)	D ₁ Cuttinghole (mm)	H Height (mm)
4 inches	124	100	72
6 inches	180	150	86
8 inches	240	200	92

Ordering Description -



Standard Range

SKU	SKU Description	Size	Wattage	Equivalent Wattage	Lumens	Colour Temperature
60920	LED ECO DOWNLIGHT 10W 3000K	4 Inch	10	18W CFL	675	3000K
60921	LED ECO DOWNLIGHT 10W 4000K	4 Inch	10	18W CFL	750	4000K
60913	LED ECO DOWNLIGHT 15W 3000K	6 Inch	15	26W CFL	1080	3000K
60914	LED ECO DOWNLIGHT 15W 4000K	6 Inch	15	26W CFL	1200	4000K
60908	LED ECO DOWNLIGHT 33W 4000K	8 Inch	33	2 × 26W CFL	2700	4000K

Indent Options (Minimum Order Quantities and Lead Times Apply)

SKU	SKU Description	Size	Wattage	Equivalent Wattage	Lumens	Colour Temperature
60922	LED ECO DOWNLIGHT 10W 5000K	4 Inch	10	18W CFL	750	5000K
60915	LED ECO DOWNLIGHT 15W 5000K	6 Inch	15	26W CFL	1200	5000K
60907	LED ECO DOWNLIGHT 33W 3000K	8 Inch	33	2 × 26W CFL	2450	3000K
60909	LED ECO DOWNLIGHT 33W 5000K	8 Inch	33	2 × 26W CFL	2700	5000K



Printing Code: LEDECODL-EN-20131108